

MPM-2000

Large-Diaphragm Condenser Microphone

User Guide
Guía del usuario
Guide d'utilisation

Guida per l'uso
Benutzerhandbuch


Box Contents
Contenido de la caja
Contenu de la boîte
Contenuti della confezione
Lieferumfang



Technical Specifications
Especificaciones técnicas
Spécifications techniques
Specifiche tecniche
Technische Daten

Type	Gold-plated, 34mm-diameter-diaphragm capsule condenser microphone
Polar Pattern	Cardioid
Frequency Response	20–20000 Hz
Sensitivity	-32 dB $\pm$ 2 dB (0 dB = 1 V/Pa @ 1 kHz)
Impedance	Output: 55 Ω $\pm$ 30% (@ 1 kHz) Load: $\geq$ 1000 Ω
Self-Noise	14 dBA
Maximum SPL	137 dB (THD α 1%, 1 kHz)
Signal-to-Noise Ratio	80 dB
Power Requirement	Requirement: 48VDC phantom power Current: 3 mA
Dimensions (height x diameter)	9.1" x 1.9" / 230 x 47 mm
Weight	0.92 lbs. / 0.42 kg

Polar Pattern
Patrón polar
Diagramme polaire
Figura polare
Polardiagramm

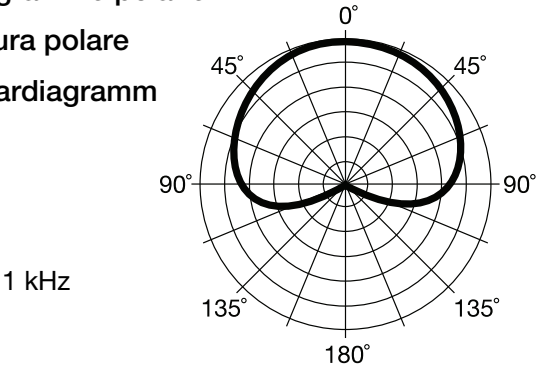

Frequency Response
Respuesta en frecuencia
Réponse en fréquence
Risposta di frequenza
Frequenzgang

