


TRIPOD SCREEN

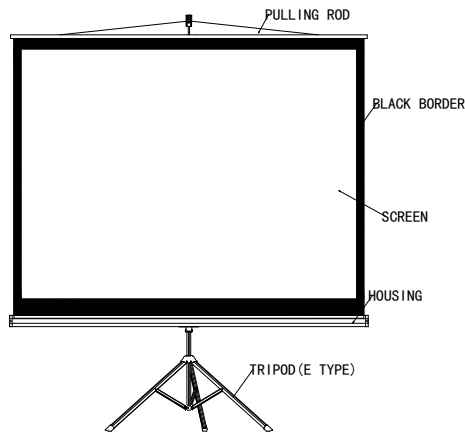

1. INSTALLING

Choose a suitable place for installing, open the tripod feet first, pull out the upper bar to a suitable height and lock it. Hang the pulling rod above to the goose neck and adjust the screen height, then finally fix/lock it at the position which you want. After using, release the screen and put it back to the housing.

2. USEFUL INSTRUCTIONS

The tripod legs should be placed steady.

When adjusting the height of screen, move the upper bar slowly and carefully.

3. WARNINGS

- a. The screen cannot be folded. Do not use fingers or hard objects to touch the screen surface. Do not splash the milk, fruit juice or other chemical doses to the screen surface. Keep the screen far away from high temperature objects or fire.
- b. If the screen is dirty, wash it gently with a clean cloth or a cotton ball. Do not use the organic solvents to clean the screen surface.
- c. When pulling the screen down, it must be done slowly and vertically. Do not pull it roughly. Stop pulling as soon as the black border is out or when the screen is jammed. Send the screen to the service center if the jammed is permanent.
- d. After using, retract the screen back to the housing in order to prevent dirt. If not using it for a long time, please remove the screen from the wall and pack it in a carton.