

Photometric Report

SAM0904920004 Track light 15W (NW), , Ordercode

REPORT SUMMARY

Output

Total Lumens:	1053 Lumen
Peak Intensity:	2078 candela
Illuminance @ 5m:	83 lx
CRI:	94,5
CCT:	3928 K

Optical

Beam Angle (50%)	38,8 °
Field Angle (10%)	67,9 °


Conditions:

Power Supply:	223 V
Power:	13,2 W
Current:	0,063 A
Power Factor:	0,93




MEASUREMENTS


Angular Beam Distribution

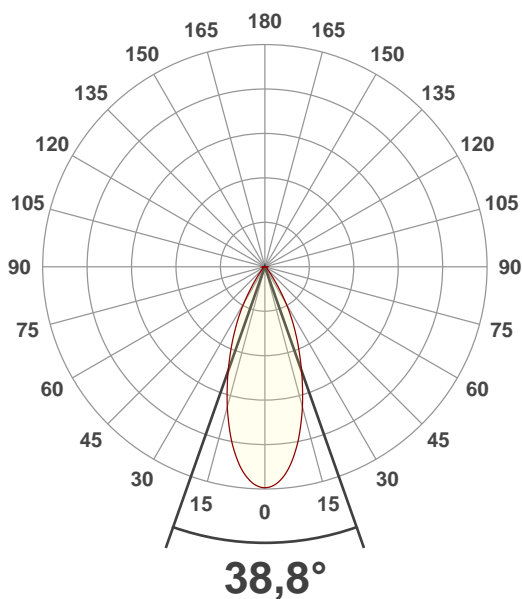

Spectral Distribution

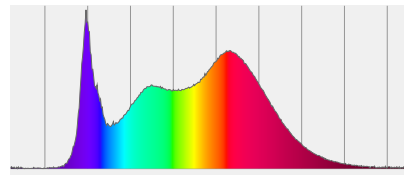

CIE 1931

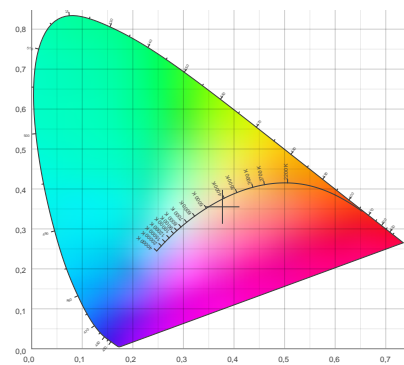


Photometric Report




SAM0904920004 Track light 15W (NW), , Ordercode

BEAM DETAILS

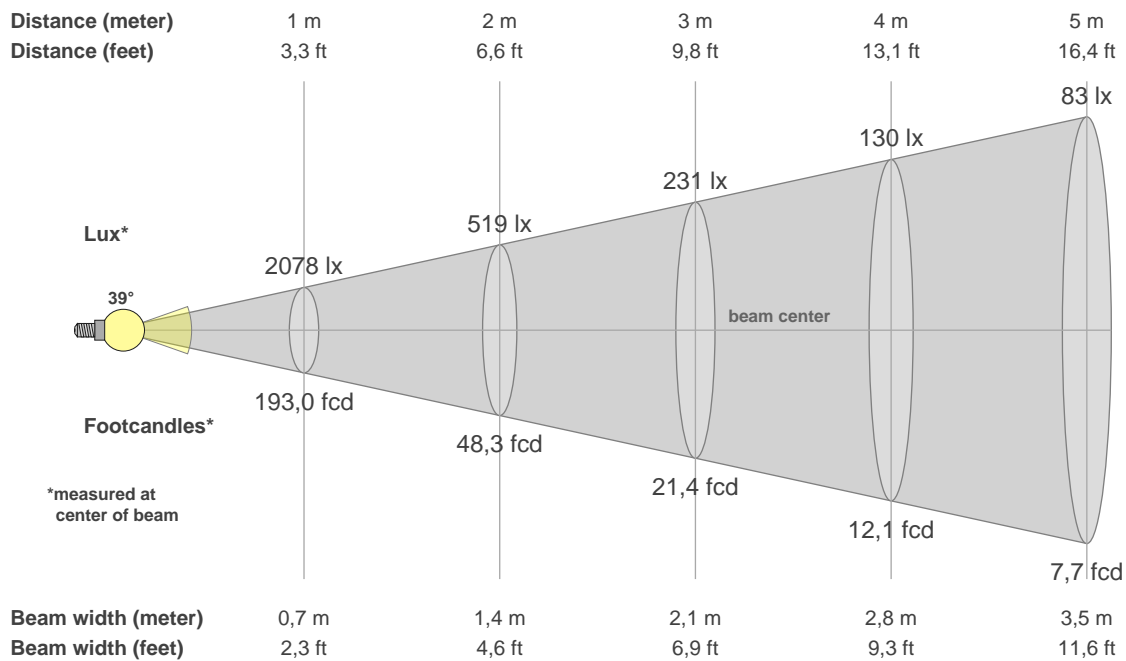

Beam Illuminances from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
2078lx	519lx	231lx	130lx	83lx	58lx	42lx	32lx	26lx	21lx	17lx	14lx	12lx	11lx	9lx	8lx	7lx	6lx	6lx	5lx
193fcd	48,3fcd	21,4fcd	12,1fcd	7,7fcd	5,4fcd	3,9fcd	3fcd	2,4fcd	1,9fcd	1,6fcd	1,3fcd	1,1fcd	1fcd	0,9fcd	0,8fcd	0,7fcd	0,6fcd	0,5fcd	0,5fcd

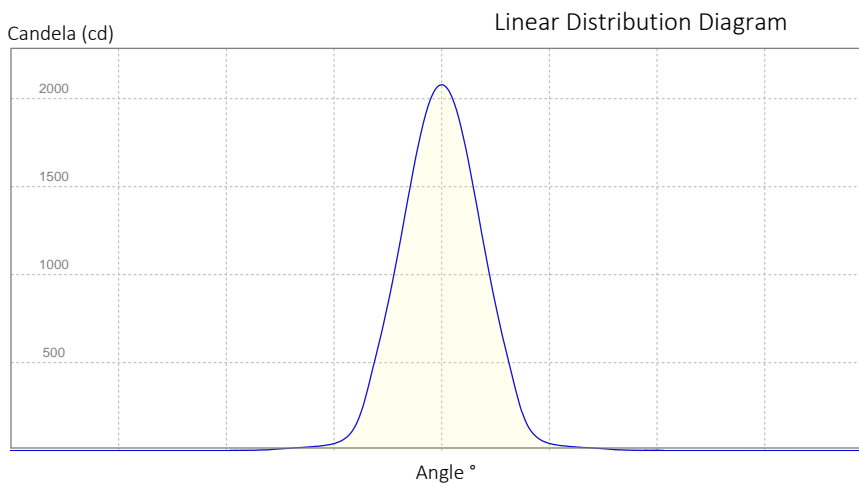


Beam Angle (50%): 38,8 °
 Field Angle (10%): 67,9 °
 Cutoff Angle (3%): 85,3 °

Photometric Report



SAM0904920004 Track light 15W (NW), , Ordercode

POLAR DIAGRAMS

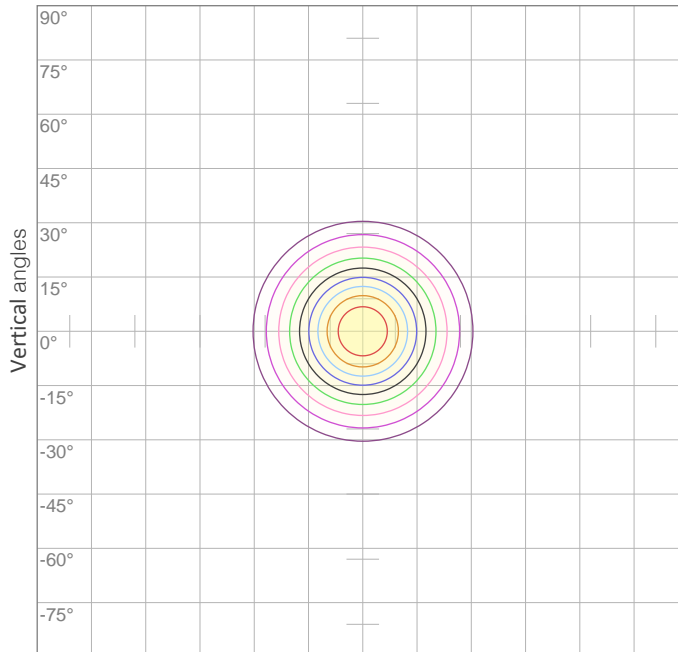


ISO candela diagram

10%	208 cd
20%	416 cd
30%	623 cd
40%	831 cd
50%	1039 cd
60%	1247 cd
70%	1455 cd

Conditions:

Number of c-planes: {C_PLANES}

Candela at center: 2078 cd

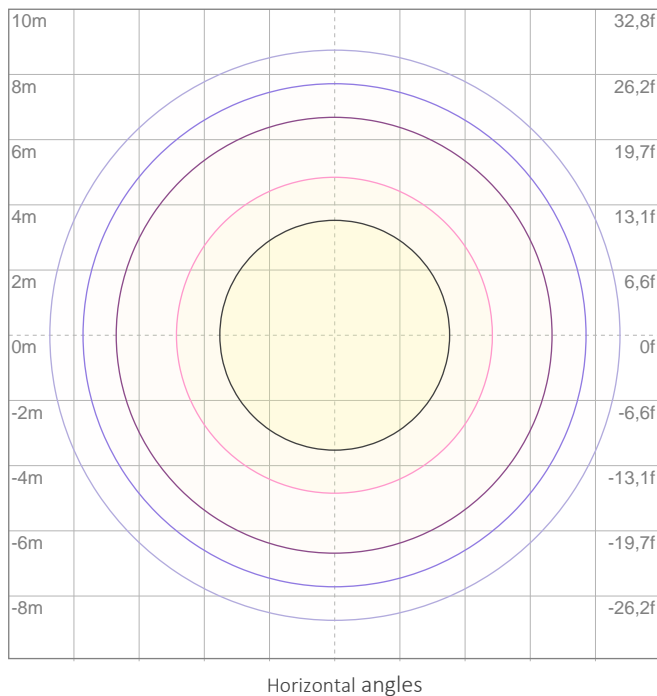

ISO lux diagram

3%	0,623 lx
5%	1,04 lx
10%	2,08 lx
30%	6,23 lx
50%	10,4 lx

Conditions:

Number of c-planes: 2

Lux at center: 20,8 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters (33 feet)

Photometric Report



SAM0904920004 Track light 15W (NW), , Ordercode


CHROMATICITY REPORT

Total Lumens: 1053 lm
Peak Intensity: 2078 cd
Fixture Efficiency: 80 Lumen/Watt

Color Temperature: 3928 K
CRI: 94,5
CRI R9: 90,6
CQS: 94,8
TM-30 Rf: 92,9
TM-30 Rg: 104,2
 Δuv : -0,0094
1st Dominant Wavelength: 448 nm
2nd Dominant Wavelength: 616 nm



Spectral Distribution

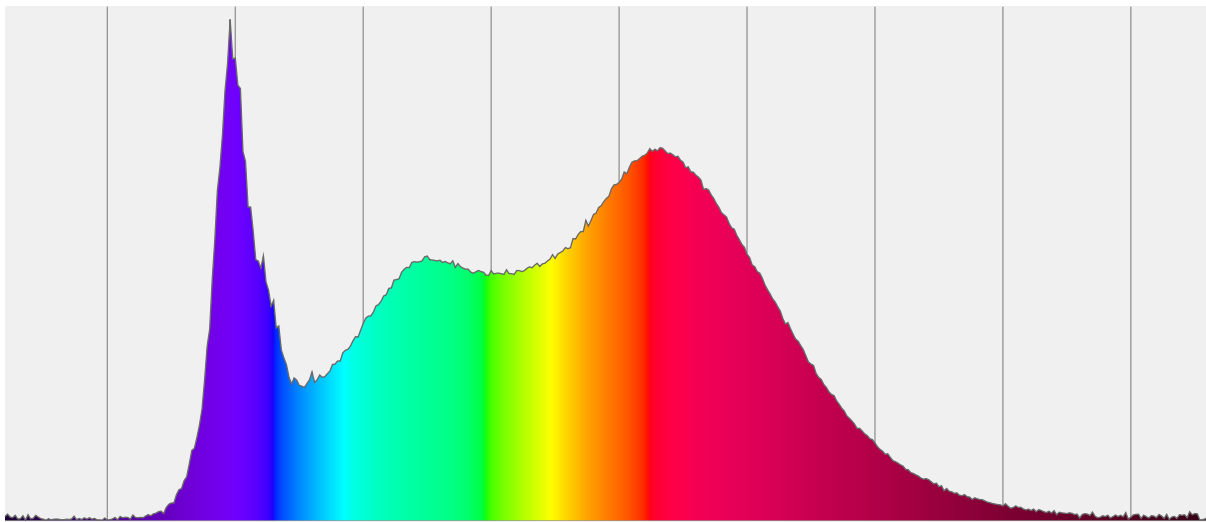

Color

3928 K
CIE 1931 Coordinates:
X: 0,377 Y: 0,355

Color Temperature

3928 K

CRI

94,5


Photometric Report




SAM0904920004 Track light 15W (NW), , Ordercode

CHROMATICITY


CIE 1931

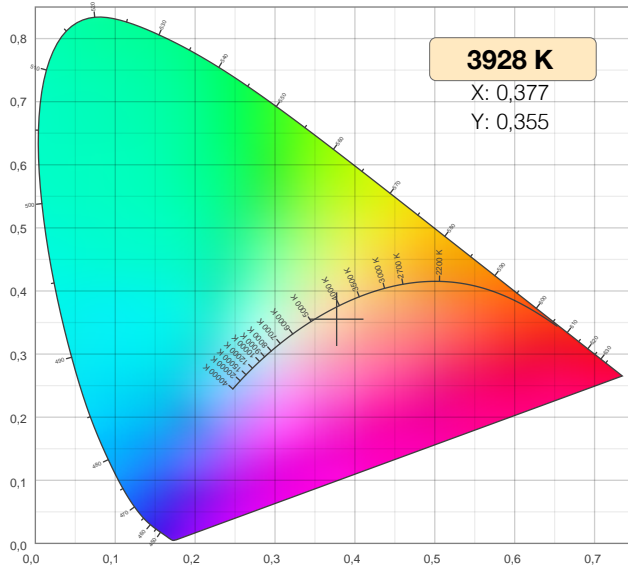


CIE 1931 - Detail

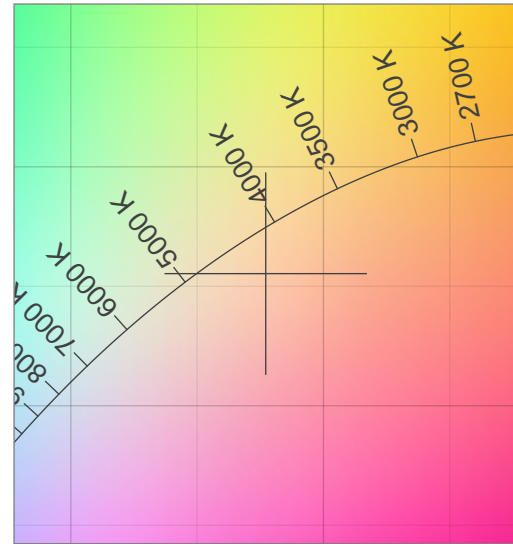

CRI: 94,5 (R1-R8)

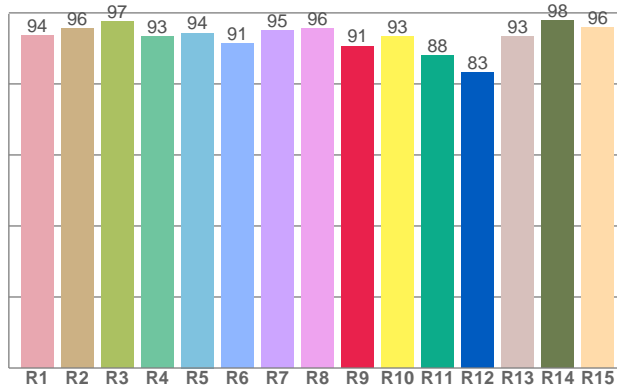

CQSI: 94,8

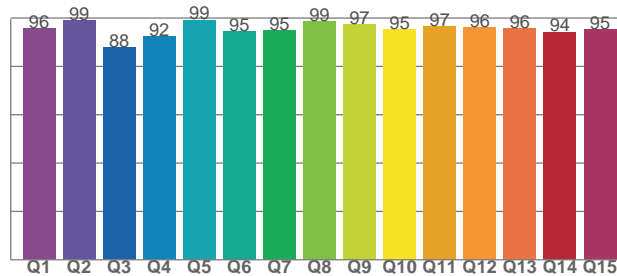

Photometric Report




SAM0904920004 Track light 15W (NW), , Ordercode

TM-30-18 DETAILS


Rf 92,9
Fidelity index Rf

Rg 104,2
Gamut index Rg


Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	95	-1%	0%
2	96	0%	1%
3	93	1%	3%
4	95	0%	1%
5	93	0%	2%
6	93	4%	2%
7	94	3%	1%
8	93	2%	2%
9	94	2%	3%
10	95	0%	3%
11	89	4%	6%
12	89	5%	3%
13	92	5%	-3%
14	93	6%	1%
15	91	3%	-4%
16	89	2%	-6%

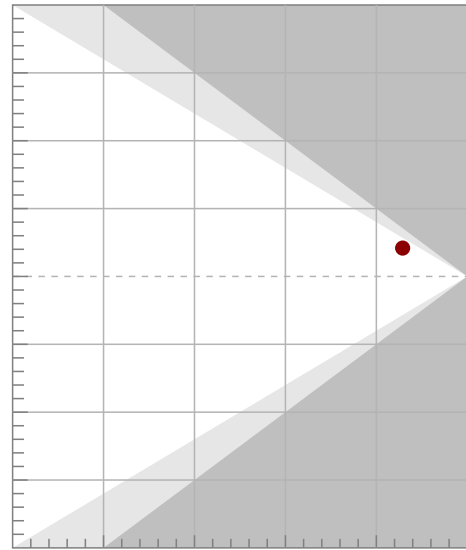


TM30-18 Color Vectors

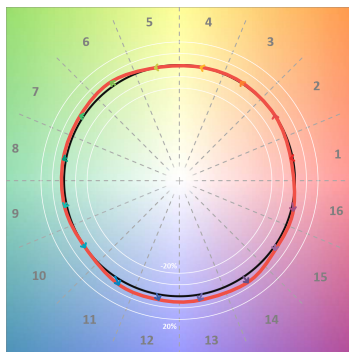


Rf by Hue Bin

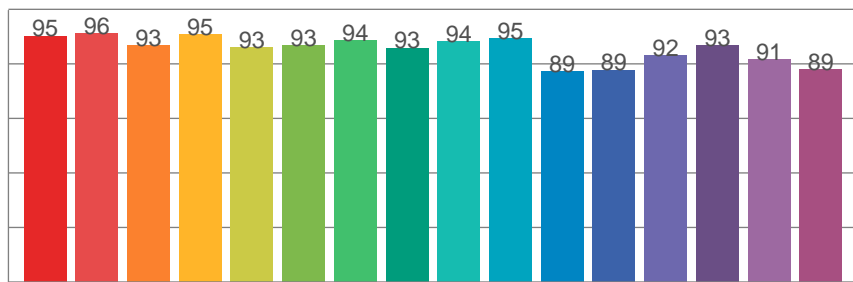

TM30 Color Distortion

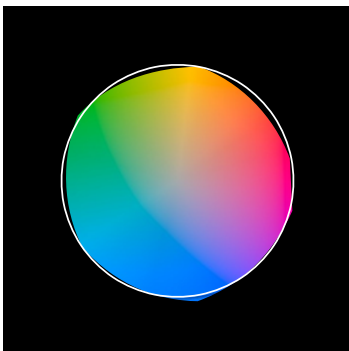

TM30 Chroma Shift

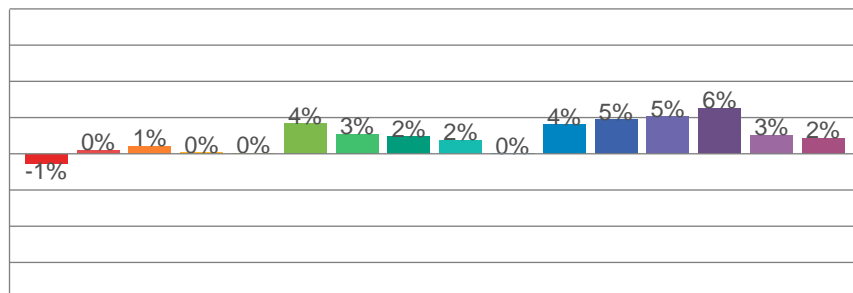

TM30 Color Fidelity Sample Chart

