

Photometric Report



SAM0904920002 LED zoomTrack light 30W (WW - wide), Zoom wide, Ordercode

REPORT SUMMARY

Output

Total Lumens:	1741 Lumen
Peak Intensity:	1850 candela
Illuminance @ 5m:	74 lx
CRI:	90,9
CCT:	2907 K

Optical

Beam Angle (50%)	60,1 °
Field Angle (10%)	86,8 °


Conditions:

Power Supply:	223 V
Power:	29,7 W
Current:	0,134 A
Power Factor:	0,99




MEASUREMENTS


Angular Beam Distribution

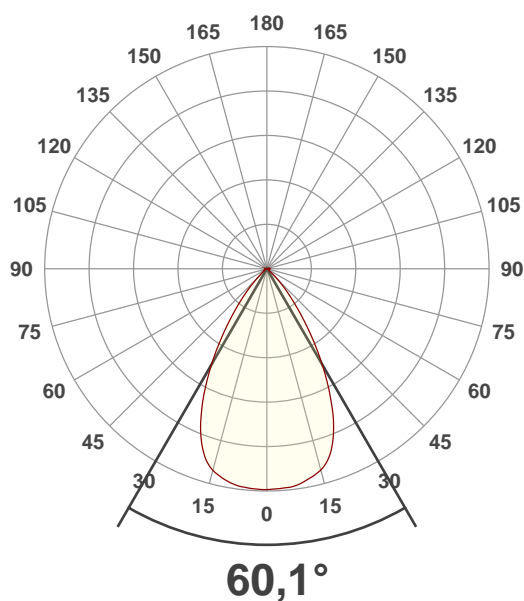

Spectral Distribution

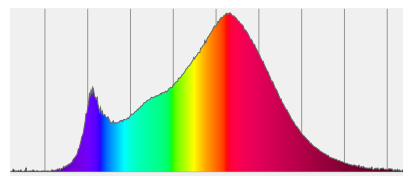

CIE 1931

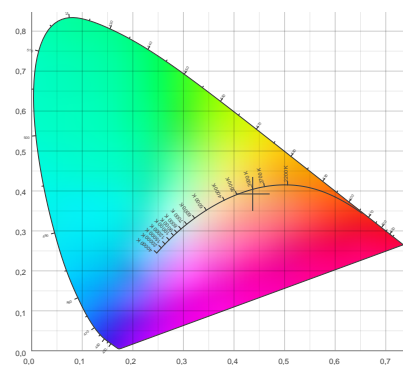


Photometric Report




SAM0904920002 LED zoomTrack light 30W (WW - wide), Zoom wide, Ordercode

BEAM DETAILS

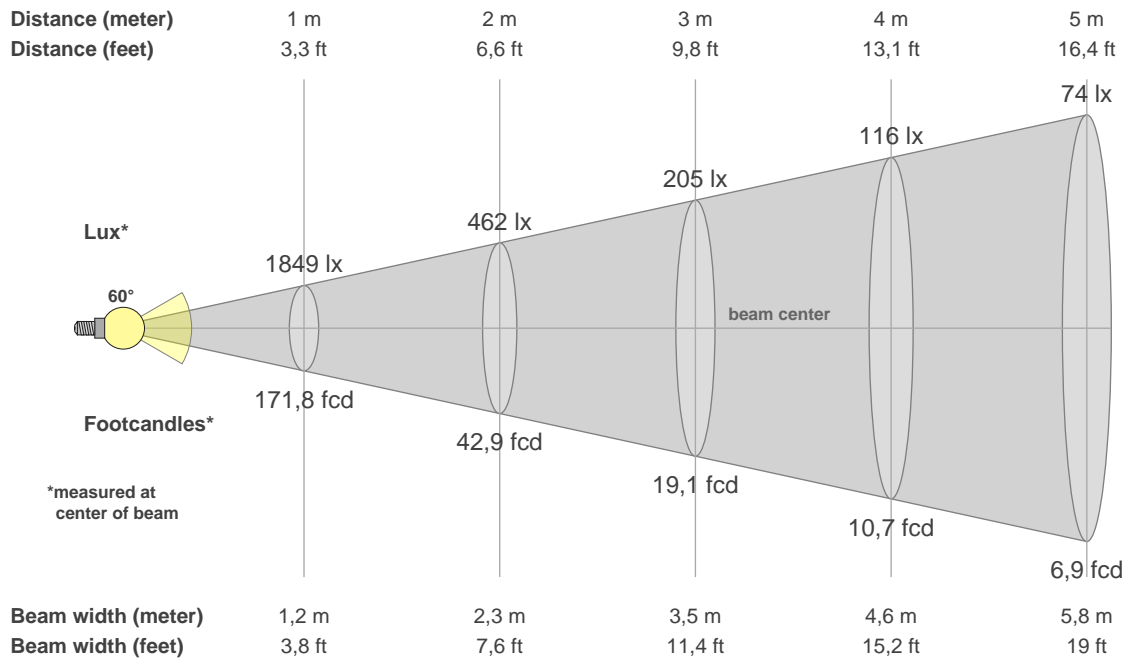

Beam Illuminances from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
1849lx	462lx	205lx	116lx	74lx	51lx	38lx	29lx	23lx	18lx	15lx	13lx	11lx	9lx	8lx	7lx	6lx	6lx	5lx	5lx
171,8fcd	42,9fcd	19,1fcd	10,7fcd	6,9fcd	4,8fcd	3,5fcd	2,7fcd	2,1fcd	1,7fcd	1,4fcd	1,2fcd	1fcd	0,9fcd	0,8fcd	0,7fcd	0,6fcd	0,5fcd	0,5fcd	0,4fcd

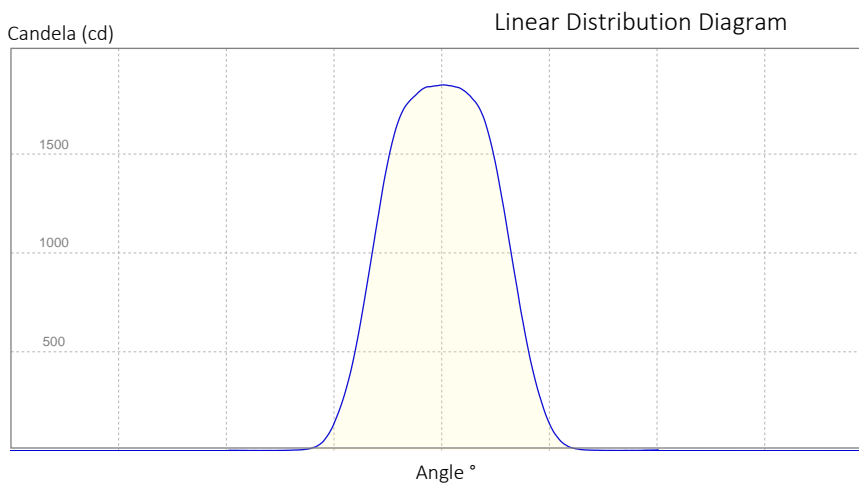


Beam Angle (50%): 60,1 °
 Field Angle (10%): 86,8 °
 Cutoff Angle (3%): 99,5 °

Photometric Report



SAM0904920002 LED zoomTrack light 30W (WW - wide), Zoom wide, Ordercode

POLAR DIAGRAMS

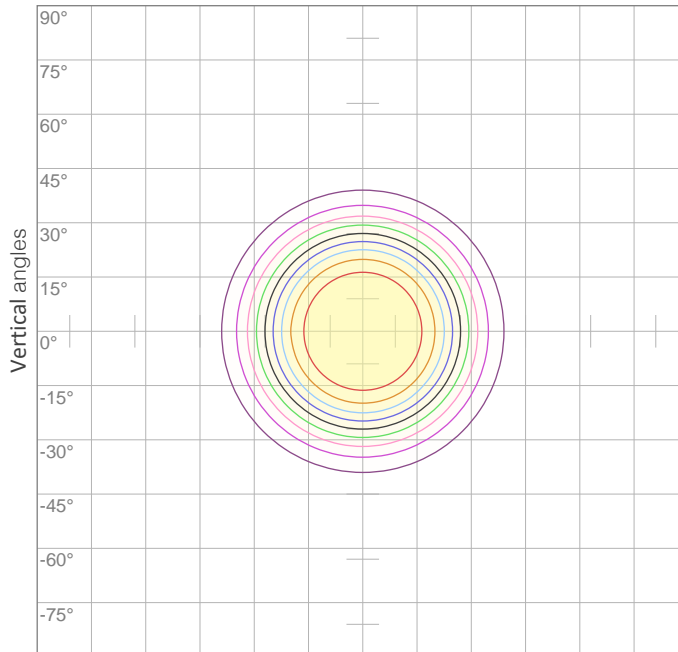


ISO candela diagram

10%	185 cd
20%	370 cd
30%	555 cd
40%	740 cd
50%	925 cd
60%	1109 cd
70%	1294 cd

Conditions:

Number of c-planes: {C_PLANES}

Candela at center: 1849 cd

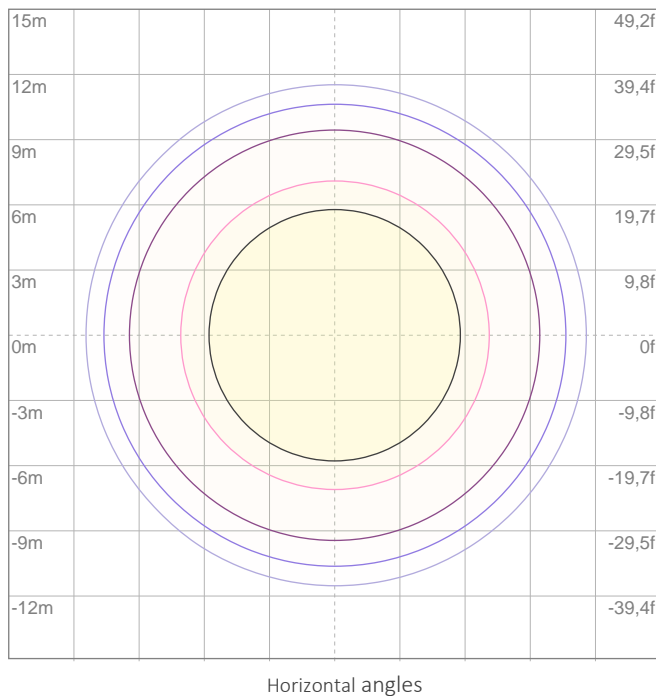

ISO lux diagram

3%	0,555 lx
5%	0,925 lx
10%	1,85 lx
30%	5,55 lx
50%	9,25 lx

Conditions:

Number of c-planes: 2

Lux at center: 18,5 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Mounting height: 10 meters (33 feet)

Photometric Report



SAM0904920002 LED zoomTrack light 30W (WW - wide), Zoom wide, Ordercode

CHROMATICITY REPORT

Total Lumens: 1741 lm
Peak Intensity: 1850 cd
Fixture Efficiency: 59 Lumen/Watt

Color Temperature: 2907 K
CRI: 90,9
CRI R9: 52,7
CQS: 89,7
TM-30 Rf: 90,3
TM-30 Rg: 97,7
 Δuv : -0,0046
1st Dominant Wavelength: 616 nm
2nd Dominant Wavelength: 456 nm



Spectral Distribution



Color

2907 K
CIE 1931 Coordinates:
X: 0,437 Y: 0,393

Color Temperature

2907 K

CRI

90,9


Photometric Report




SAM0904920002 LED zoomTrack light 30W (WW - wide), Zoom wide, Ordercode

CHROMATICITY


CIE 1931

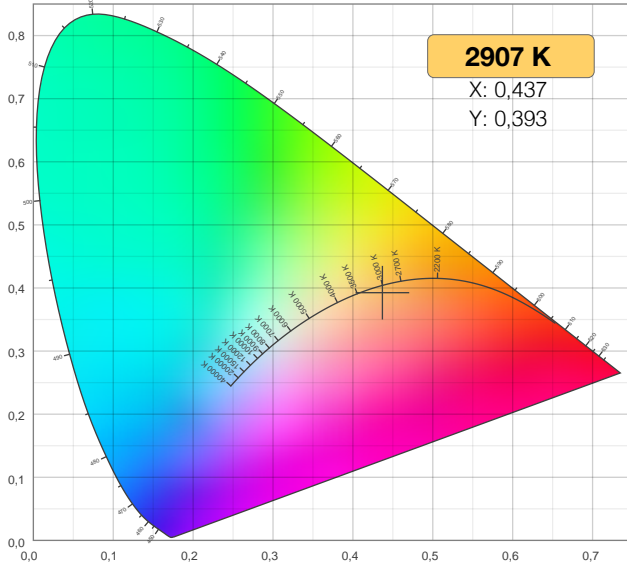


CIE 1931 - Detail

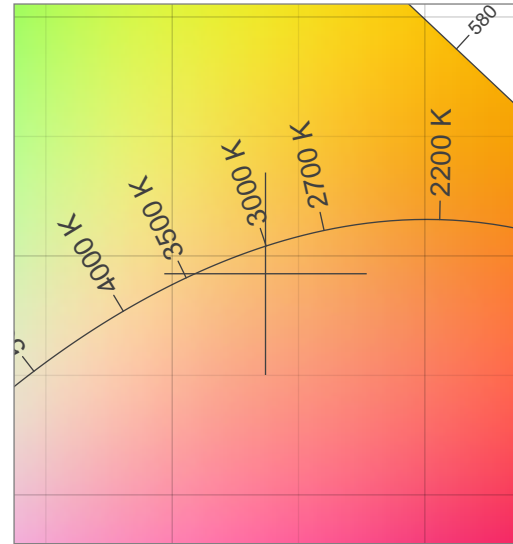

CRI: 90,9 (R1-R8)

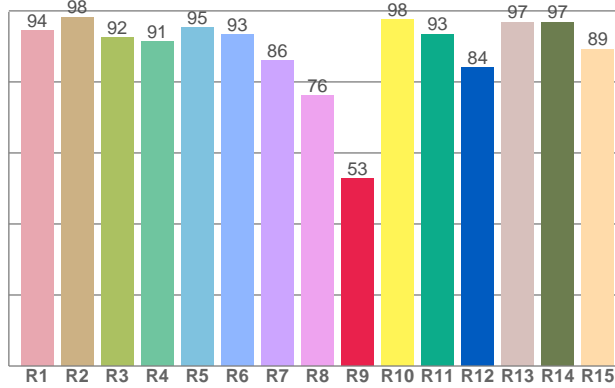

CQSI: 89,7

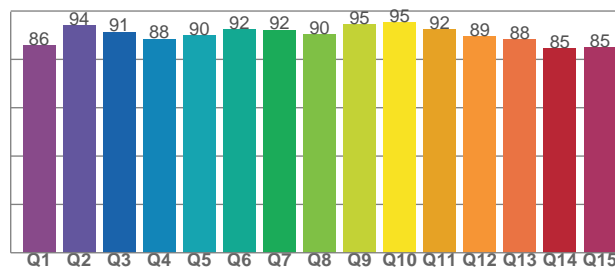

Photometric Report




SAM0904920002 LED zoomTrack light 30W (WW - wide), Zoom wide, Ordercode

TM-30-18 DETAILS


Rf 90,3
Fidelity index Rf

Rg 97,7
Gamut index Rg


Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	88	-6%	2%
2	91	-3%	4%
3	91	-1%	4%
4	94	-2%	-1%
5	95	-2%	0%
6	95	0%	-1%
7	91	-5%	1%
8	95	-2%	2%
9	91	-1%	6%
10	89	1%	7%
11	90	4%	6%
12	89	6%	-3%
13	87	2%	-10%
14	85	2%	-13%
15	89	-4%	-4%
16	83	-6%	-12%

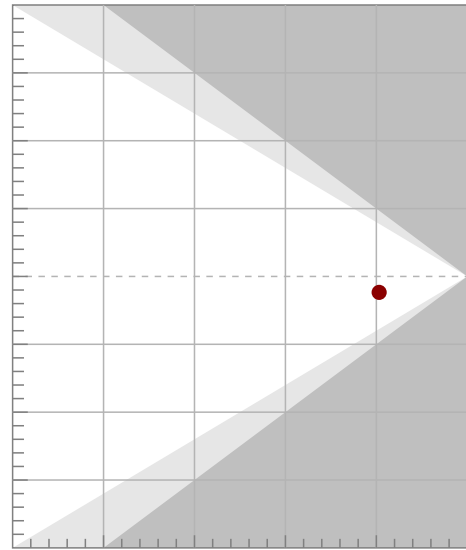

TM30-18 Color Vectors

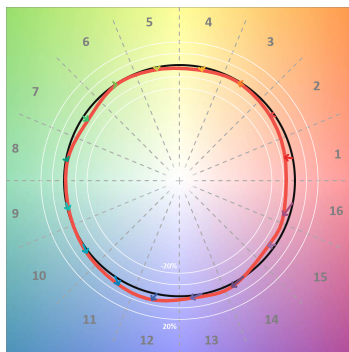


Rf by Hue Bin

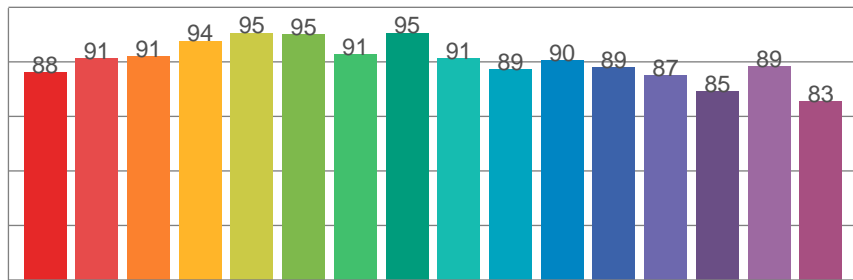

TM30 Color Distortion



TM30 Chroma Shift

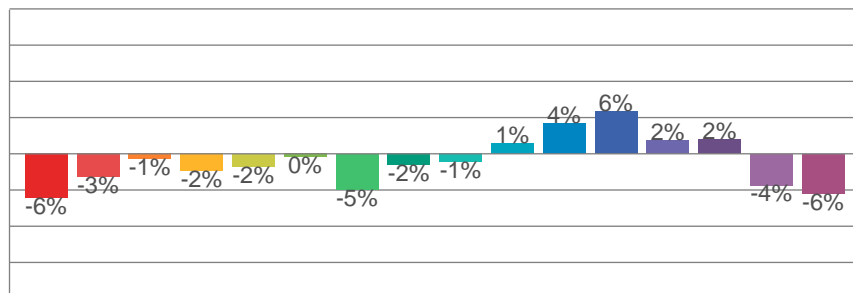

TM30 Color Fidelity Sample Chart

