


Audio Quad cable

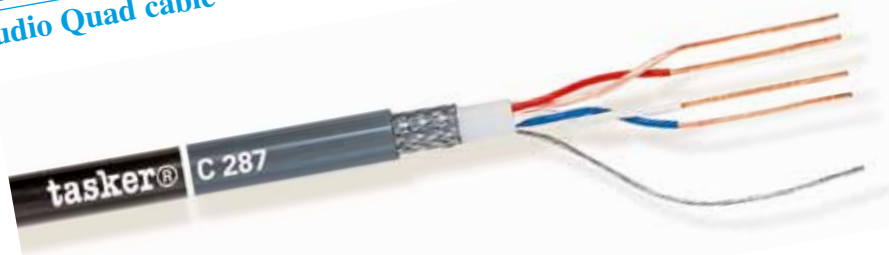

Applications:

Professional audio QUAD cable for Broadcast.
Cable with two pairs for double balancing
between the conductors and the total shield.

Characteristics:

Conductors: O.F.C. red copper
Cond. Insulation: Compact XLPE
Pair colours: Transparent-Red,
Transparent-Blue

Waste filler between conductors
Total taping in unweaved polyester
Shield: Braided covering 100%
O.F.C. tinned copper

Sheath: PVC
Sheath colours: Black, Grey



tasker® Code	Cond. number	Nominal section mm²	Cond. Format. mm.	External Core Ø mm.	External Cable Diameter mm.	Reel or Spool (* pag. II)		
						mt.	Type	Kg.
C287	2x2	2 x 2 x 0,22 (24 AWG)	28x0,10	1,1	6,6	100	B	6,0

Conductor Resistance	Capacity Core/core	Capacity Core/shield
Ω/Km ± 5%	pF/mt	pF/mt
90	65	120
	Max rated Voltage AC - V	Operative Temperature °C
	49	-15 / +70

Microphone cable



Applications:

Special flexible audio cable with separate
shielded cores suitable for microphone bases.

Characteristics:

Conductors: O.F.C. tinned copper
Cond. Insulation: PVC
Core colours: Green, Blue
Black, Yellow

Shields: Braided covering 95%
O.F.C. red copper

Sheath: PVC
Sheath colour: Black



tasker® Code	Cond. number	Nominal section mm²	Cond. Format. mm.	External Core Ø mm.	External Cable Diameter mm.	Reel or Spool (* pag. II)		
						mt.	Type	Kg.
C207	2 +2	2 x 0,15 +2 x 0,15 (25 AWG)	19x0,10	1,2	4,7	100	B	3,8

Conductor Resistance	Capacity Core/core	Capacity Core/shield
Ω/Km ± 5%	pF/mt	pF/mt
120		260
	Max rated Voltage AC - V	Operative Temperature °C
	49	-15 / +70

Notes: