


Darkglass Microtubes 900v2
D-112877

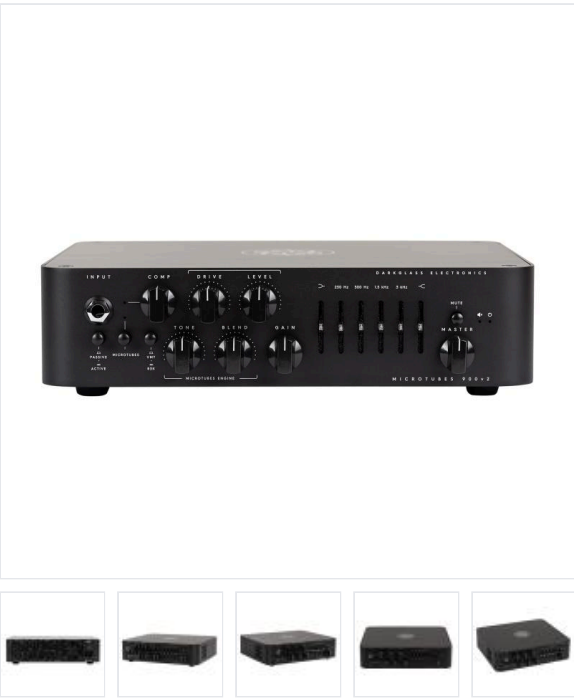

With enhanced durability, improved equalizer, studio-grade compression, impulse response cabinet emulation, and MIDI control, the Microtubes 900 v2 features all the options the modern, professional bassist needs in a compact, sleek, and loud format.

PRICE:
€ 1,349.00

CONTROLS

PASSIVE/ACTIVE	Active or passive bass
MICROTUBES	Turn on or off the Microtubes Engine
COMPRESSION	Amount of dynamic compression
DRIVE	Amount of distortion of the Microtubes Engine
TONE	Controls the high harmonic content
LEVEL	Microtubes Engine's output volume
BLEND	Mix between the Clean and the Distorted signal
B3K/VMT	Switch between B3K and VMT mode
GAIN	Gain stage before EQ section (Low/High)
BASS	+/- 12dB at 80Hz
MIDS	+/- 12dB at 250, 500, 1.5k or 3kHz
TREBLE	+/- 12dB at 5kHz
MASTER	Overall volume of the amplifier
MUTE	Overall mute of the amplifier

TECHNICAL SPECIFICATIONS

INPUT IMPEDANCE	1 M Ω
MAXIMUM LOAD	4 Ω (2 Ω in 2 Ω mode)
MAX. POWER	900 W RMS @ 4 Ω
POWER AMP INPUT LEVEL	4 Ω mode: 1500 mV RMS, 2 Ω mode: 1200 mV RMS
PRE-AMP OUTPUT IMPEDANCE	1 k Ω
MAX. POWER CONSUMPTION	approx. 700 VA
COOLING	Forced air-cooled
AC INPUT POWER	100-250 VAC
AC FREQUENCY	50/60 Hz

DIMENSIONS

WIDTH	26.7 cm / 10.5"
DEPTH	25.5 cm / 10"
HEIGHT	7.0 cm / 2.75"
WEIGHT	2.9 kg / 6.39 lbs